

铭客钢带

Mingke Steel Belt

鼓式硫化机专用钢带

Steel Belts for Rotocure



上海铭客传动系统有限公司
电话: 021-33616578
邮箱: lin@mingkebelt.com
地址: 上海市闵行区沪闵路 6088 号凯德闵行商业中心 1906 室, 邮编 201199
Shanghai Mingke Process Systems Co.,Ltd.
Tel: 021-33616578
E-mail: sales@mingkebelt.com
Add: Rm. 1906, CapitalLand Minhang Plaza, No. 6088 Humin Rd.,
Minhang Dist., Shanghai 201199, China

工厂 | 南京铭客传动系统有限公司
电话: 025-56806003
地址: 江苏省南京市高淳经济开发区桃园北路 50 号, 邮编 211316
Factory | Nanjing Mingke Process Systems Co.,Ltd.
Tel: 025-56806003
Add: No. 50 North Taoyuan Rd., Gaochun Economic Dvpt. Zone,
Nanjing City, Jiangsu Prov. 211316, China

www.mingkebelts.com



上海铭客传动系统有限公司
Shanghai Mingke Process Systems Co.,Ltd.

RUBBER INDUSTRY

橡胶行业

2025.09.19

鼓式硫化机专用钢带

Steel Belts for Rubber Rotary Curing Machine (Rotocure)

鼓式硫化机是一种可连续硫化的专用设备, 一般都是配备比较优质的钢带。配制钢带的好坏是直接影响产品质量及产能的关键因素。

Rotary Curing Machinery (Rotocure) is a continuous rubber drum vulcanization equipment, it is generally equipped with a relatively high quality steel belt to achieve continuous production. The quality of the equipped steel belt is a key factor which impact the quality of product and the production capacity.



鼓硫应用

Applications of Rotocure

- 橡胶板、片 Rubber sheets
 - 橡胶带制品 Rubber belts
 - 橡塑地板 Rubber & plastic flooring
 - 橡胶颗粒板 Rubber particle board
- 橡胶内衬 Rubber lining
 - 防水材料 Waterproof material
 - 印刷橡皮布 Printing mackintosh
 - 输送带 Conveyors
- 墙纸 Wallpaper
 - 纤维板 Fiber board
 - 其他 Others



钢带尺寸

Dimension of Steel Belt

- 长度 Length- ≤150 m/pc
- 宽度 Width- 600-6000 mm
- 厚度 Thickness- 0.6/1.2/1.6/1.8/2.0/2.3/... mm


钢带型号

Steel Belt Model



钢带服务

Steel Belt Services

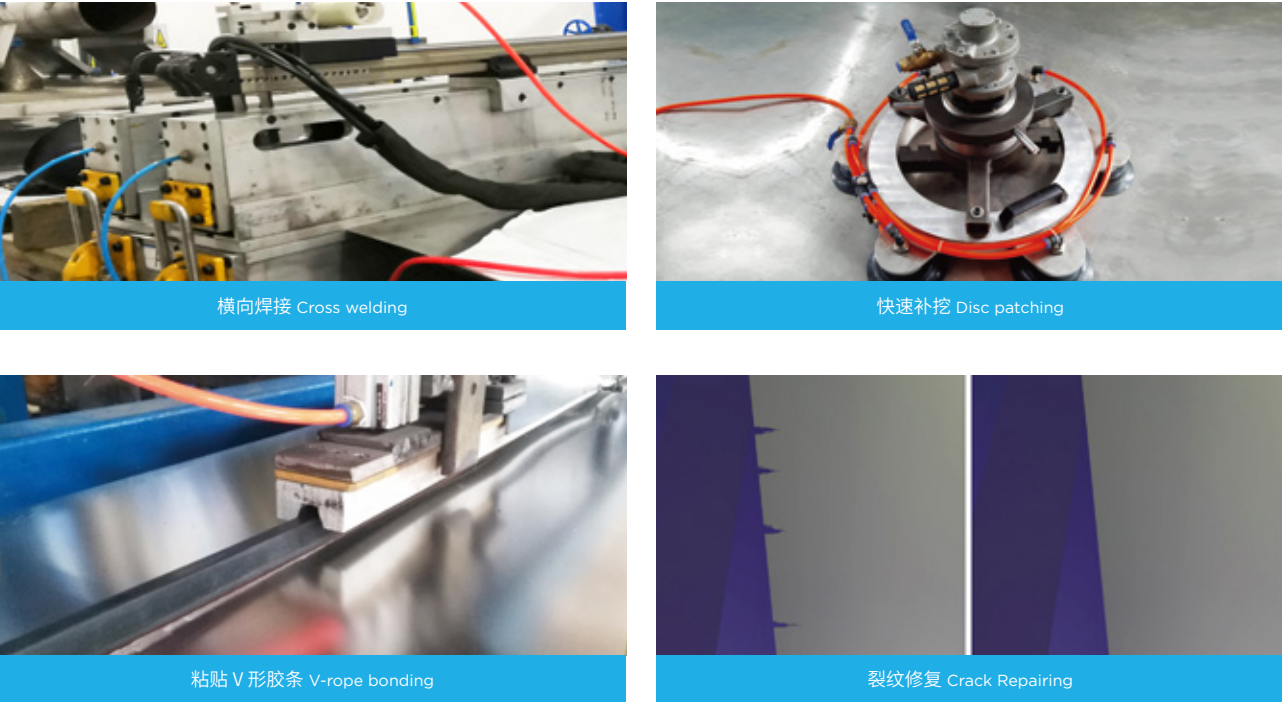

铭客钢带型号及主要性能参数

Steel Belt Model & Main Specifications

钢材类型 Type of steel		马氏体不锈钢钢带 Martensitic stainless steel belt
指标 Index	型号 Model	MT1650
抗拉强度 (Mpa) Tensile Strength (Mpa)		1600
屈服强度 (Mpa) Yield Strength (Mpa)		1550
硬度 (HV _{0.2}) Hardness (HV _{0.2})		480
延伸率 % Elongation %		5
焊接系数 Welding Factor		0.8

* 全资料中数据是具代表性但并不受到绝对保证。数据亦会因所用材料不同而改变。
* The information and data presented in this data sheet are typical values, but not guaranteed. The information may be subjected to changes in material, properties and/or performance.